


Габаритно-присоединительные размеры тормозных резисторов серии FCI

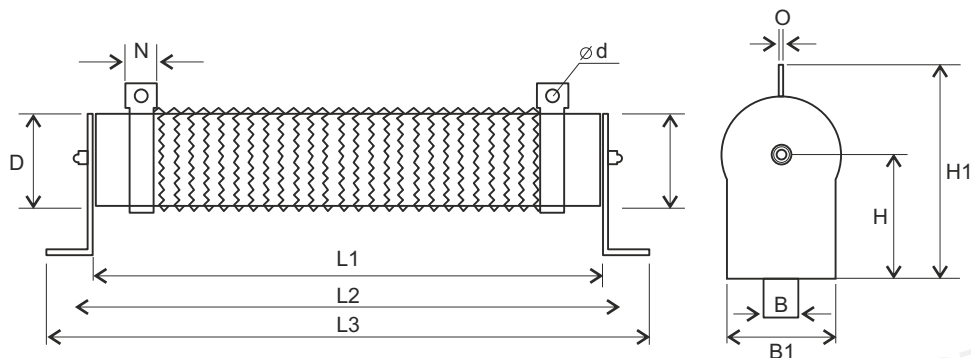

Мощность, кВт	Резистор, Ом	Размеры, мм										
		L1	L2	L3	D	B	B1	H	H1	N	d	O
80	400	152	168	196	28	6	28	27	60	10	4	1
160	200	192	202	234	40	8	40	41	88	12	5	1
	600	192	202	234	40	8	40	41	88	12	5	1
250	120	282	292	325	40	8	40	41	88	12	5	1
	400	282	292	325	40	8	40	41	88	12	5	1
400	80	282	292	325	40	8	40	41	88	12	5	1
	250	282	292	325	40	8	40	41	88	12	5	1
600	150	330	360	385	50	6	40	42	94	12	6	1
1000	100	300	330	355	70	8	70	67	134	16	6	2
1200	75	300	330	355	70	8	70	67	134	16	6	2
2000	50	520	545	570	70	8	70	67	134	16	6	2
	15	520	545	570	70	8	70	67	134	16	6	2
2500	40	600	625	650	70	8	70	67	134	16	6	2
3000	50	700	725	750	70	8	70	67	134	16	6	2
	12	700	725	750	70	8	70	67	134	16	6	2
	10	700	725	750	70	8	70	67	134	16	6	2
	5	700	725	750	70	8	70	67	134	16	6	2